



LM55EVF DC GARAGE DOOR OPENER

Maintenance-free, ultra-quiet including LED light.

KEY FEATURES



SPACE-SAVING
Design maximizes versatility

LED LIGHT
LED turns on with activation

LIFTING
For doors up to 90 kg



SMART

SPACE-SAVING DESIGN OPENS UP THE CEILING.

BELT DRIVE SYSTEM FOR POWERFUL PERFORMANCE.

SOFT-START AND SOFT-STOP FOR SMOOTH OPERATION.

QUIET AND RELIABLE

QUIET DC MOTOR ELIMINATES NOISE AND VIBRATIONS THROUGH THE CEILING AND PROVIDES SMOOTH OPERATION.

HEAVY-LIFTING POWER OPERATES DOORS UP TO 90 KG.

MAINTENANCE-FREE BELT DRIVE ENSURES QUIET & DURABLE OPERATION.

WARRANTY MOTOR: 3 YEARS, CONTROL BOARD: 3 YEARS, ACCESSORIES: 2 YEARS.

SECURE & SAFE

AUTOMATIC GARAGE DOOR OPENERS IMPEDE UNAUTHORIZED ACCESS TO THE GARAGE.

TIMER-TO-CLOSE AUTOMATICALLY CLOSES THE DOOR AFTER A PRESET AMOUNT OF TIME.

EVOLUTION RADIO (SECURITY+ 2.0®) SENDS A NEW CODE WITH EVERY REMOTE CLICK.

AUTOMATIC FORCE SETTING & OBSTACLE DETECTION.

INCLUDED ACCESSORIES:

4-CHANNEL REMOTE CONTROL TX4EVF
Operates up to 4 openers. Compact to provide quick, easy garage access.



POWERFUL ADD-ONS:

2-BUTTON WIRELESS WALL CONTROL 128EV
Operates up to 2 openers. Control your garage door without a remote control.



WIRELESS KEYPAD 747EV
Provides convenient, secure access from outside the garage with a 4-digit PIN, temporary PIN possible.



ILLUMINATED PUSH BUTTON 75EV
Wired push button.



FAILSAFE SAFETY SENSOR 772E
2-wire system with LiftMaster signal IP44, range 15 meters.



MASTERFUL ENGINEERING.

MOTOR

- Residential-Duty 24 V DC
- Automatic Thermal Protection
- Permanent Lubrication
- Operating Temperature: -30°C to 55°C

POWER


- 230-240 V AC
- 50/60 Hz Voltage
- 0.8 W Stand-by Power
- 80 cm Power Cord (Euro plug)¹

MECHANICS

- High Quality Chassis and Cover
- Reliable & Quiet Belt Drive Mechanism
- Automatic Force Setting
- Electronic Limits for Easy Setup
- Maintenance-Free Operation thanks to Belt Drive

600N

DC GARAGE DOOR OPENER FOR DOORS UP TO 90 KG.

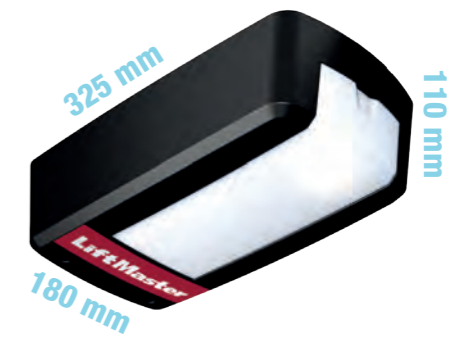

Max. 100 mm

Per second for door to move upward

Max. 100 mm

Per second for door to move downward

STANDARD SPECS.

EVOLUTION RADIO (Security+ 2.0®)

High Range:

- 4-Button Remote Control (TX4EVF)
- Remote Control: 868 MHz Tri-Band
- Garage Door Opener: Frequency Agile on 433 and 868 MHz
- Copy-Protected Coding

RADIO

433/868 MHz

- Provides 2-way communication from garage door opener and accessories.
- Receiver with 40 memory registers.

HOMELINK® COMPATIBLE (VERSION V OR SOFTWARE REV. 8)²

¹UK adapter available.

²May require an external adapter depending on the model and year of your vehicle. Visit HomeLink.com for additional information.

ELECTRICAL LIGHTING LED LIGHT




- LED turns on with activation
- Turns off 2.5 minutes after operation
- 0.8 W Stand-by Power

SAFETY AND SECURITY.

- External Quick Release (optional)
- Automatic Trolley Reconnect
- Down Safety Reverse
- Up Safety Stop
- Timer to Close (automatic close) Programming (when safety sensors connected)



For more information visit us at liftmaster.eu or contact your local dealer.

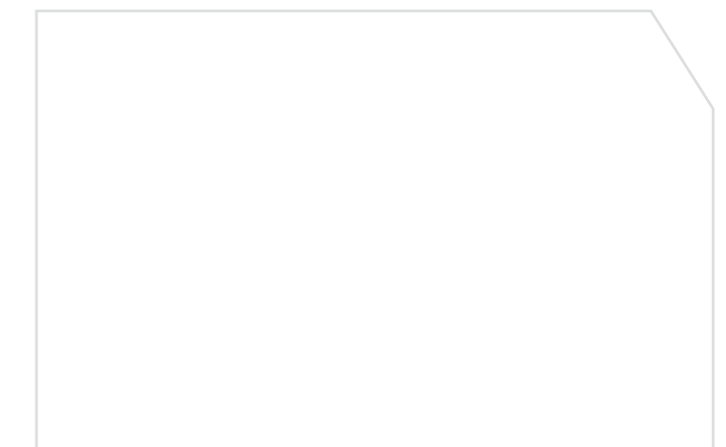

LM55EVF 600N
DC GARAGE DOOR OPENER
FOR DOORS UP TO 90 KG

© 2018 LiftMaster All Rights Reserved
Chamberlain GmbH, Alfred-Nobel-Str. 4, D-66793, Saarwellingen
LiftMaster.eu, WEEE-Reg.Nr. DE66256568
MyQ® is a registered trademark of Chamberlain Group
HomeLink® is a trademark of Gentex Corporation
9SLM55EVF02



LiftMaster